


62mm Half Bridge IGBT Module

电气特性:

- 1200V 沟槽栅/场终止工艺
- 低开关损耗
- 正温度系数

典型应用:

- 逆变焊机
- 感应加热

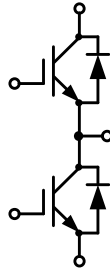

$V_{CES}=1200V$, $I_{C\ nom}=300A$ / $I_{CRM}=600A$

IGBT, 逆变器 / IGBT, Inverter

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
集电极-发射极电压 Collector-Emitter voltage	$T_{vj}=25^{\circ}C$	V_{CES}	1200	V
连续集电极直流电流 Continuous DC collector current	$T_C=100^{\circ}C$, $T_{vj\ max}=175^{\circ}C$	$I_{C\ nom}$	300	A
集电极重复峰值电流 Repetitive peak collector current	$t_p=1\ ms$	I_{CRM}	600	A
总功率损耗 Total power dissipation	$T_C = 25^{\circ}C$, $T_{vj\ max} = 175^{\circ}C$	P_{tot}	1600	W
栅极-发射极电压 Gate emitter voltage		V_{GE}	± 20	V

特征值 / Characteristic Values

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
集电极-发射极饱和电压 Collector-Emitter saturation voltage	$V_{GE}=15V$, $I_C=300A$ $V_{GE}=15V$, $I_C=300A$ $V_{GE}=15V$, $I_C=300A$	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	V_{CESat}	2.25 2.75 2.85	2.75	V
栅极-发射极阈值电压 Gate-Emitter threshold voltage	$I_C = 8mA$, $V_{GE} = V_{CE}$	$T_{vj}=25^{\circ}C$	$V_{GE(th)}$	5.20	5.80	6.40
栅电荷 Gate charge	$V_{GE}=-15V\dots+15V$		Q_G	1.42		μC
内部栅极电阻 Internal gate resistor			R_{Gint}	1.72		Ω
输入电容 Input capacitance	$f=1\ MHz$, $V_{CE}=25\ V$, $V_{GE}=0\ V$	$T_{vj}=25^{\circ}C$	C_{ies}	22.51		nF

反向传输电容 Reverse transfer capacitance		C_{res}		0.8		
集电极-发射极截止电流 Collector-emitter cut-off current	$V_{CE}=1200V, V_{GE}=0V$	$T_{vj}=25^{\circ}C$	I_{CES}		2	mA
栅极-发射极漏电流 Gate-emitter leakage current	$V_{CE}=0V, V_{GE}=20V$	$T_{vj}=25^{\circ}C$	I_{GES}		200	nA
开通延迟时间 Turn-on delay time	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	t_{don}		115 120 123	ns
上升时间 Rise time	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	t_r		57 61 63	
关断延迟时间 Turn-off delay time	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	t_{doff}		274 305 311	
下降时间 Fall time	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	t_f		118 174 178	
开通损耗能量 (每脉冲) Turn-on energy loss per pulse	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	E_{on}		16.28 27.11 62.5	mJ
关断损耗能量 (每脉冲) Turn-off energy loss per pulse	$I_C=300A, V_{CE}=600V$ $V_{GE}=\pm 15V, R_G=3\Omega$ (电感负载) / (inductive load)	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$	E_{off}		17.89 21.25 22.21	
短路数据 SC data	$V_{GE}\leq 15V, V_{CC}=800V$ $V_{CEmax}=V_{CES}-L_{sCE}\cdot di/dt \quad t_p\leq 10\mu s, T_{vj}=150^{\circ}C$		I_{SC}		1012	A
结-外壳热阻 Thermal resistance, junction to case	每个 IGBT / per IGBT		R_{thJC}		0.093	K/W
在开关状态下温度 Temperature under switching conditions			$T_{vj op}$	-40	150	$^{\circ}C$

二极管, 逆变器 / Diode, Inverter

最大额定值 / Maximum Ratings

Parameter	Conditions	Symbol	Value	Unit
反向重复峰值电压 Repetitive peak reverse voltage	$T_{vj}=25^{\circ}C$	V_{RRM}	1200	V
连续正向直流电流 Continuous DC forward current		I_F	300	A
正向重复峰值电流 Repetitive peak forward current	$t_p=1ms$	I_{FRM}	600	A
I^2t 值 I^2t -value	$t_p=10ms, \sin 180^{\circ}, T_j=125^{\circ}C$	I^2t	19000	A^2S

特征值 / Characteristic Values

Edited by Semi-Future Technologies, Edition 1.2

Publication: 2021-10-18

Parameter	Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
正向电压 Forward voltage	$I_F=300A$ $I_F=300A$ $I_F=300A$	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$		2.70 2.00 1.90	3.20	V
反向恢复峰值电流 Peak reverse recovery current	$I_F=300A,$ $-di_F/dt=3375A/\mu s(T_{vj}=150^{\circ}C)$ $V_R=600V, V_{GE}=-15V$	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$		70 122 122		A
恢复电荷 Recovered charge	$I_F=300A,$ $-di_F/dt=3375A/\mu s(T_{vj}=150^{\circ}C)$ $V_R=600V, V_{GE}=-15V$	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$		18.66 22.00 24.68		μC
反向恢复损耗（每脉冲） Reverse recovered energy	$I_F=300A,$ $-di_F/dt=3375A/\mu s(T_{vj}=150^{\circ}C)$ $V_R=600V, V_{GE}=-15V$	$T_{vj}=25^{\circ}C$ $T_{vj}=125^{\circ}C$ $T_{vj}=150^{\circ}C$		2.63 6.66 7.69		mJ
结-外壳热阻 Thermal resistance, junction to case	每个二极管 / per diode				0.15	K/W
在开关状态下温度 Temperature under switching conditions			$T_{vj\ op}$	-40	150	$^{\circ}C$

模块 / Module

Parameter	Conditions	Symbol	Value			Unit
绝缘测试电压 Isolation test voltage	RMS, $f=50Hz, t=1min$	V_{ISOL}		4000		V
内部绝缘 Internal isolation				Al_2O_3		
储存温度 Storage temperature		T_{stg}	-40		125	$^{\circ}C$
模块安装的扭矩 Mounting torque for modul mounting		M	3.0		6.0	Nm
重量 Weight		W		324		g

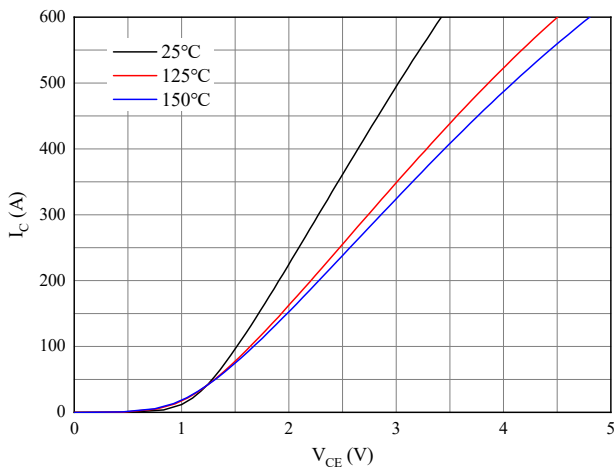


图 1. 典型输出特性 ($V_{GE}=15V$)

Figure 1. Typical output characteristics ($V_{GE}=15V$)

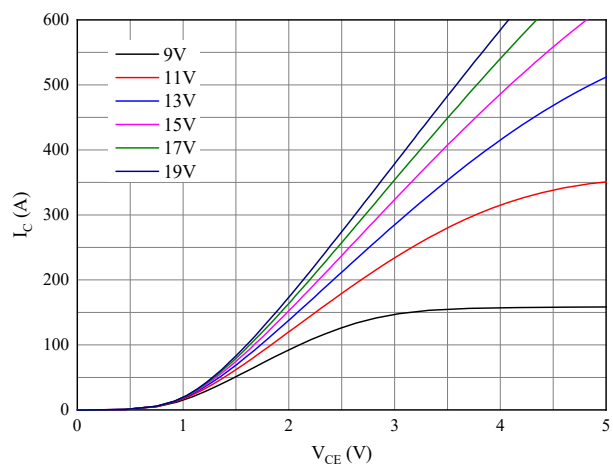


图 2. 典型输出特性 ($T_{vj}=150^{\circ}C$)

Figure 2. Typical output characteristics ($T_{vj}=150^{\circ}C$)

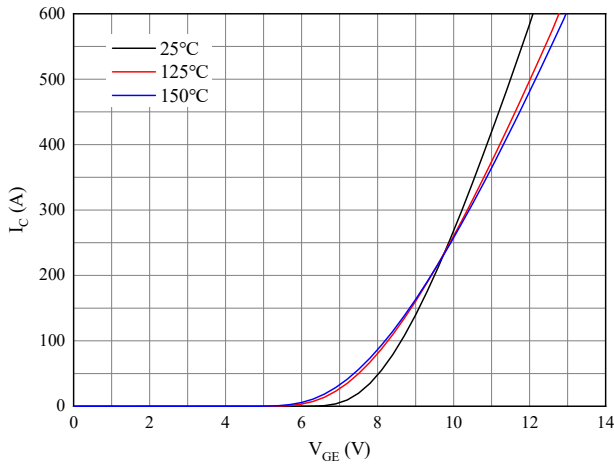


图 3. 典型传输特性 ($V_{CE}=20V$)

Figure 3. Typical transfer characteristic ($V_{CE}=20V$)

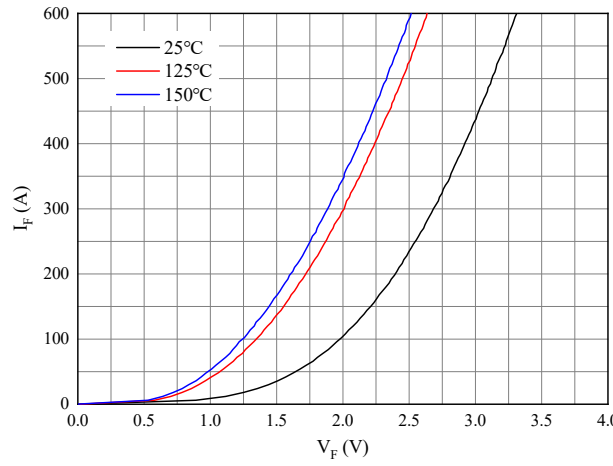


图 4. 正向偏压特性 二极管

Figure 4. Forward characteristic of Diode

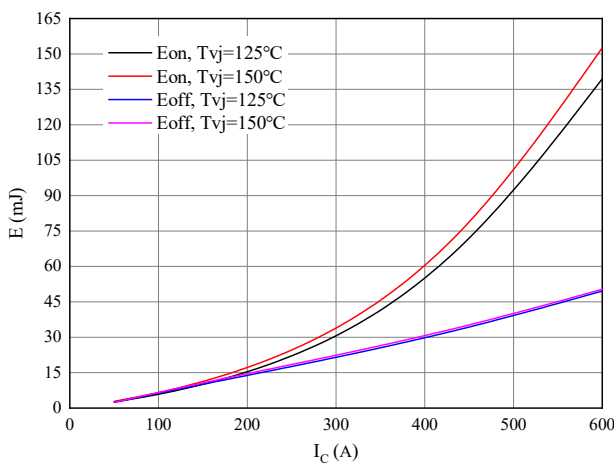


图 5. 开关损耗 逆变器

Figure 5. Switching losses of IGBT

$V_{GE}=\pm 15V, R_{Gon}=3\Omega, R_{Goff}=3\Omega, V_{CE}=600V$

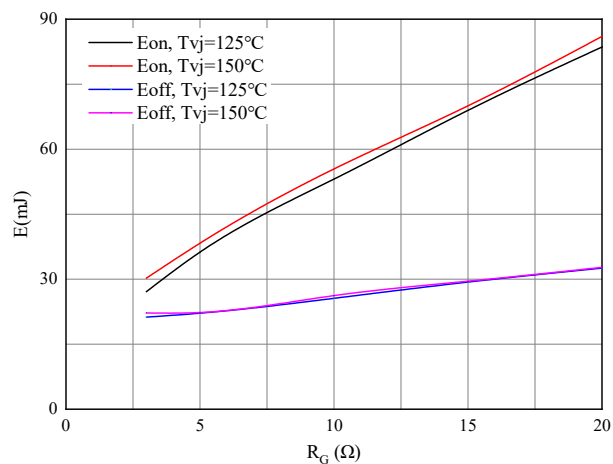


图 6. 开关损耗 逆变器

Figure 6. Switching losses of IGBT

$V_{GE}=\pm 15V, I_C=300A, V_{CE}=600V$

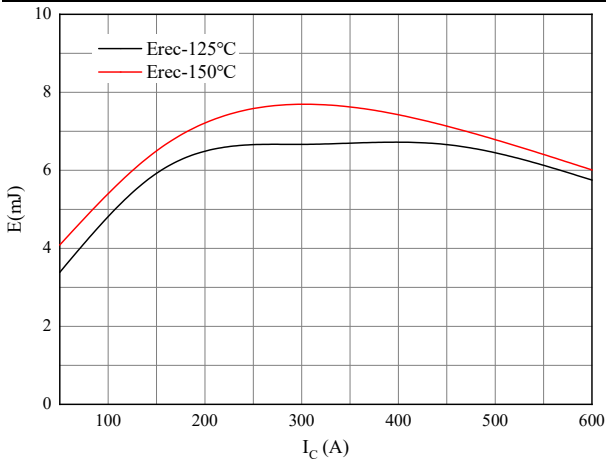


图 7. 开关损耗二极管

Figure 7. Switching losses of Diode

$R_{Gon}=3\ \Omega, V_{CE}=600V$

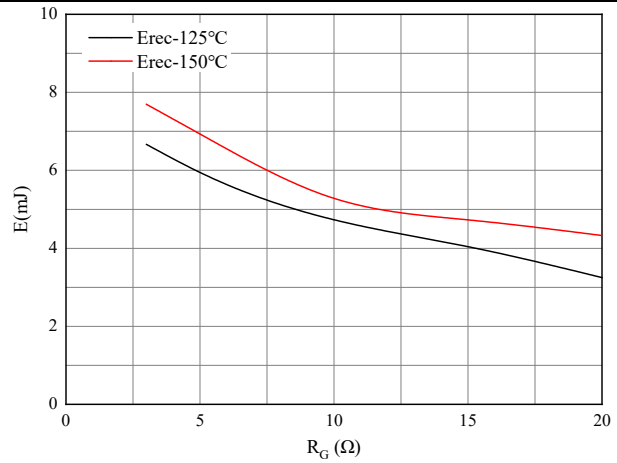


图 8. 开关损耗二极管

Figure 8. Switching losses of Diode

$I_F=300A, V_{CE}=600V$


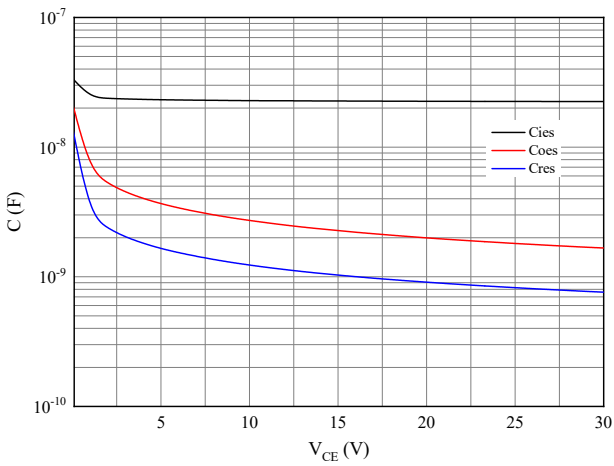


图 9. 电容特性

Figure 9. Capacitance characteristic

接线图 / Circuit diagram

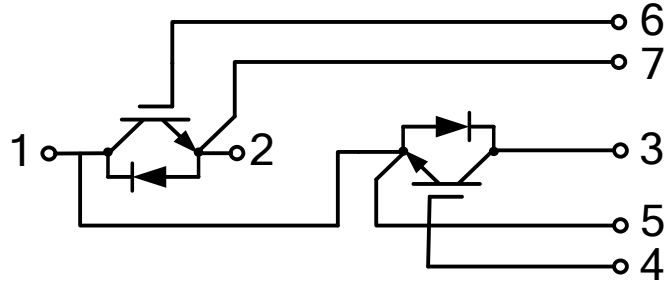

封装尺寸 / Package outlines

